


XQY-PS2-5/1000-NE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	5 ~ 1000 MHz
插入损耗 Insertion Loss	≤ 1.0 dB (Excluding theoretical loss 未含理论损耗 3.0 dB)
输入驻波 Input Port VSWR	Typ.1.15 / Max.1.25
输出驻波 Output Port VSWR	Typ.1.12 / Max.1.25
隔离度 Isolation	Typ.26dB / Min.17dB
幅度平衡 Amplitude Balance	≤ 0.3dB
相位平衡 Phase Balance	±3°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	N-Female
承受功率 Power Rating	Splitter 分路器用时 1W; Combiner 合路器用时 0.5W
工作温度 Operation Temperature	-35°C ~ +75°C
表面处理 Surface Finishing	Sandblasting natural color conductive oxide 喷砂本导
外形尺寸 Outline Dimensions	56*34*22 (mm)
重量 Weight	145 (g)

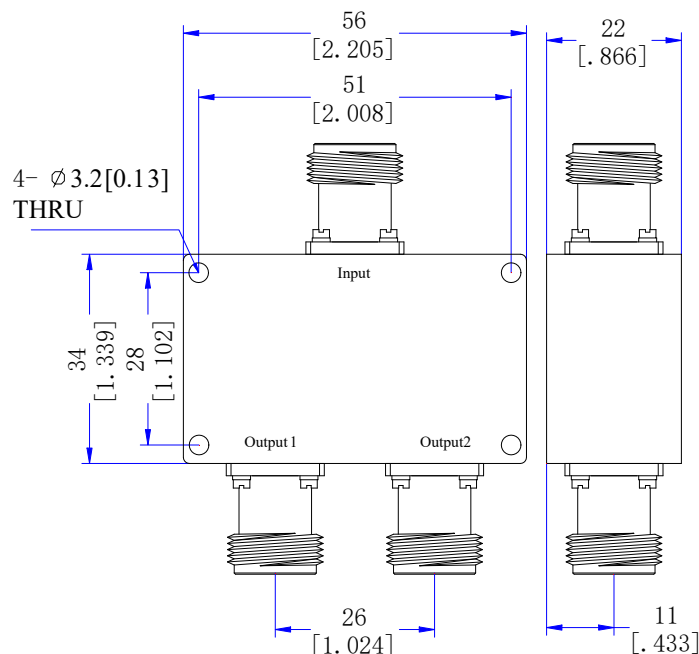

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)