


XQY-PS8-DC/6-SEY

精密高频功分/合路器

precision RF power splitter/Combiner

| 参数/Parameters | 规格/Specifications |
|------------------------------|-------------------|
| 频率范围 Frequency Range | DC ~ 6000 MHz |
| 插入损耗 Insertion Loss | ≤ 24 dB |
| 输入驻波 Input Port VSWR | ≤ 1.5: 1 |
| 输出驻波 Output Port VSWR | ≤ 1.5: 1 |
| 隔离度 Isolation | ≥ 18 dB |
| 幅度平衡 Amplitude Balance | ± 1.5 dB |
| 阻抗 Impedance | 50 Ohms |
| 端口接头 Input/Output Connectors | SMA-Female |
| 工作功率 Power Rating | 2 W |
| 工作温度 Operation Temperature | -35°C ~ +75°C |
| 表面处理 Surface Finishing | 黑色烤漆 Black paint |
| 外形尺寸 Outline Dimensions | 43.2*42.5*16(mm) |
| 重量 Weight | 63(g) |

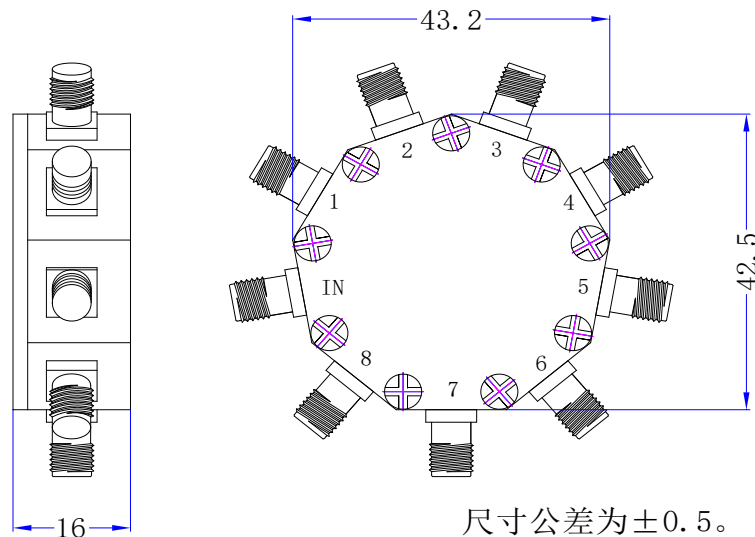

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)